

36W EI66/23 SH-E6623H Series Encapsulation Transformer

FEATURES

Frequency 50/60Hz
Potted under vacuum
Split-bobbin
Temperature class @ 40°C/B



Bulk packaging is standard.
Custom design available.

Medical equipments.
Industrial equipments.
Industrial controls.
Test equipments.
Industrial computers.
Avionics & telecom.

Additional information:


We reserve the right to make technical changes or modify the contents of this document without prior notice.

SHARE Ltd. Does not accept any responsibility what so ever for potential errors or possible lack of information in this document.

We can offer that even custom-made transformers will be covered by approvals from UL, CSA, KEMA, etc., but we will be happy to assist you in implementing them. New approvals may be required.



TECHNICAL INFORMATION

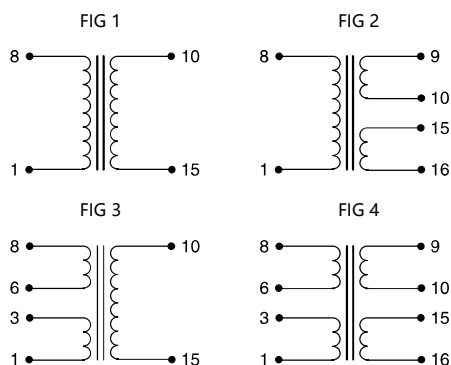

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
SH-E662301H	230	6/6000	6.9	1
SH-E662302H	230	9/4000	10.3	1
SH-E662303H	230	12/3000	13.6	1
SH-E662304H	230	15/2400	17	1
SH-E662305H	230	18/2000	20.5	1
SH-E662306H	230	24/1500	27	1
SH-E662307H	230	2*6/3000	2*6.9	2
SH-E662308H	230	2*9/2000	2*10.5	2
SH-E662309H	230	2*12/1500	2*13.6	2
SH-E662310H	230	2*15/1200	2*17.3	2
SH-E662311H	2*115	6/6000	6.9	3
SH-E662312H	2*115	9/4000	10.3	3
SH-E662313H	2*115	12/3000	13.6	3
SH-E662314H	2*115	15/2400	17	3
SH-E662315H	2*115	18/2000	20.5	3
SH-E662316H	2*115	24/1500	27	3
SH-E662317H	2*115	2*6/3000	2*6.9	4
SH-E662318H	2*115	2*9/2000	2*10.5	4
SH-E662319H	2*115	2*12/1500	2*13.6	4
SH-E662320H	2*115	2*15/1200	2*17.3	4

PHYSICAL CHARACTERISTICS(unit:mm)

