

# 50W EI66/34.7 SH-E6634H Dual 115V Series Encapsulation Transformer

1

LINER POWER



## FEATURES

Frequency 50/60Hz  
 Potted under vacuum  
 Split-bobbin  
 Temperature class @ 40°C/B



Bulk packaging is standard.  
 Custom design available.

Medical equipments.  
 Industrial equipments.  
 Industrial controls.  
 Test equipments.  
 Industrial computers.  
 Avionics & telecom.


Additional information:

We reserve the right to make technical changes or modify the contents of this document without prior notice.

SHARE Ltd. Does not accept any responsibility what so ever for potential errors or possible lack of information in this document.

We can offer that even custom-made transformers will be covered by approvals from UL, CSA, KEMA, etc., but we will be happy to assist you in implementing them. New approvals may be required.

## TECHNICAL INFORMATION

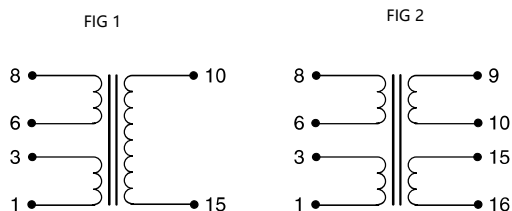

## ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
SH-E663411H	2*115	6/8333	7.2	1
SH-E663412H	2*115	9/5560	10.4	1
SH-E663413H	2*115	12/4170	13.4	1
SH-E663414H	2*115	15/3330	17	1
SH-E663415H	2*115	18/2780	20.5	1
SH-E663416H	2*115	24/2080	27.1	1
SH-E663417H	2*115	2*6/4170	2*7	2
SH-E663418H	2*115	2*9/2780	2*10.4	2
SH-E663419H	2*115	2*12/2080	2*13.6	2
SH-E663420H	2*115	2*15/1670	2*17.6	2

## PHYSICAL CHARACTERISTICS(unit:mm)

