

## 3.2W EI38/13.6 SH-E3813 Series Encapsulation Transformer

### FEATURES

Vacuum filling.  
Two compartments bobbin.  
Self-extinguishing plastics UL94V-0.  
Degree of protection IP67.



Additional information:

We reserve the right to make technical changes or modify the contents of this document without prior notice.

SHARE Ltd. Does not accept any responsibility what so ever for potential errors or possible lack of information in this document.


We can offer that even custom-made transformers will be covered by approvals from UL, CSA, KEMA, etc., but we will be happy to assist you in implementing them. New approvals may be required.

Bulk packaging is standard.  
Custom design available.


Medical equipments.  
Industrial equipments.  
Industrial controls.  
Test equipments.  
Industrial computers.  
Avionics & telecom.



### TECHNICAL INFORMATION

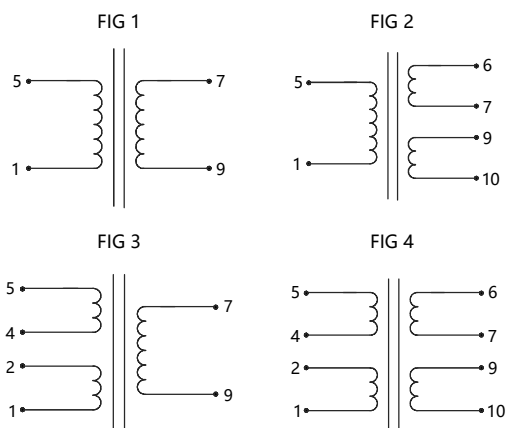

### PHYSICAL CHARACTERISTICS(unit:mm)

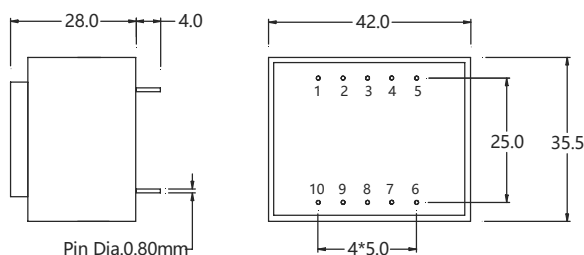

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary (V)	Secondary (V/mA)	No-load voltage(V)	Fig.
SH-E381393	230	6/533	8.0	1
SH-E381394	230	9/356	12.0	1
SH-E381395	230	12/267	16.0	1
SH-E381396	230	15/214	20.0	1
SH-E381397	230	18/178	24.1	1
SH-E381398	230	24/134	32.1	1
SH-E381399	230	2*6/267	2*8.0	2
SH-E381300	230	2*9/178	2*12.0	2
SH-E381301	230	2*12/134	2*16.0	2
SH-E381302	230	2*15/107	2*20.0	2
SH-E381303	230	2*18/89	2*24.1	2
SH-E381304	230	2*24/67	2*32.1	2
SH-E381305	115	6/533	8.0	1
SH-E381306	115	9/356	12.0	1
SH-E381307	115	12/267	16.0	1
SH-E381308	115	15/214	20.0	1
SH-E381309	115	18/178	24.1	1
SH-E381310	115	24/134	32.1	1
SH-E381311	115	2*6/267	2*8.0	2
SH-E381312	115	2*9/178	2*12.0	2
SH-E381313	115	2*12/134	2*16.0	2
SH-E381314	115	2*15/107	2*20.0	2
SH-E381315	115	2*18/89	2*24.1	2
SH-E381316	115	2*24/67	2*32.1	2
SH-E381317	2*115	6/533	8.0	3
SH-E381318	2*115	9/356	12.0	3
SH-E381319	2*115	12/267	16.0	3
SH-E381320	2*115	15/214	20.0	3
SH-E381321	2*115	18/178	24.1	3
SH-E381322	2*115	24/134	32.1	3
SH-E381323	2*115	2*6/267	2*8.0	4
SH-E381324	2*115	2*9/178	2*12.0	4
SH-E381325	2*115	2*12/134	2*16.0	4
SH-E381326	2*115	2*15/107	2*20.0	4
SH-E381327	2*115	2*18/89	2*24.1	4
SH-E381328	2*115	2*24/67	2*32.1	4